

Article I. The Dawson Specifications for County Road Resolution is hereby amended and hereafter shall state as follows:

Article I: SPECIFICATIONS FOR PAVED ROADS

Section 100. Paved Roads.

A road must meet the following minimum requirements and must originate at a county maintained road or a state route to qualify for acceptance by Dawson County as a Paved Road.

- 100.1 All Roads:** Must have a minimum of 60-foot right of way deeded to Dawson County.
- 100.2 Dead End Roads:** Will have a minimum turning diameter of ninety-five (95) feet of roadbed with a right of way diameter of 110 feet.
- 100.3 Local Roads:** Local roads are roads within the unincorporated area of Dawson County that are not included as a collector road, a commercial road, or an industrial/warehouse road; the primary purpose of a local road is to provide access to properties abutting the roadway at issue and to flow traffic to collector roads from low volume residential areas. Through traffic shall be discouraged upon local roads.

Roadbeds shall have a minimum width of twenty (20) feet of paved driving surface and 28 feet of width from shoulder point to shoulder point. A base course twenty-one (21) feet wide shall consist of a six (6) inch layer of compacted Graded Aggregate base Material. There shall be an intermediate course of an approved asphaltic concrete pavement type "E" mix, two (2) inches thick after compaction and a surface course of asphaltic concrete pavement type "F" mix, one and one-quarter (1^{1/4}) inches thick after compaction. (See attached diagram).

- 100.4 Collector Roads:** Collector roads typically allow access from residential areas; the purpose of collector roads is to collect traffic from streets in residential and commercial areas and permit the flow of traffic to the arterial roadway system. A residential collector street shall be required for the main street in a development of 125 lots or more.

Roadbeds shall have a minimum width of twenty (20) feet of paved driving surface and 28 feet of width from shoulder point to shoulder point. A base course twenty-one (21) feet wide shall consist of an eight (8) inch layer of compacted Graded Aggregate Base Material. There shall be an

intermediate course of an approved asphaltic concrete pavement type "E" mix, two (2) inches thick after compaction and a surface course of asphaltic concrete pavement type "F" mix, one and one-quarter (1 ¼) inches thick after compaction. (See attached diagram).

- 100.5 Commercial Roads:** Commercial roads are roads designed to serve a commercially zoned area or an area shown as commercial on the Future Land Use Plan of Dawson County.

Roadbeds shall have a minimum of twenty-four (24) feet of width of paved driving surface and 32 feet of width from shoulder point to shoulder point. The base course shall have a width of 25 feet and shall consist of Graded Aggregate Base Material eight (8) inches thick after compaction. There shall be an intermediate course of asphaltic concrete pavement type "B" modified mix, three (3) inches thick after compaction and a surface course of asphaltic concrete pavement type "E or F" mix, one and one-half (1 ½) inches thick after compaction. If concrete paving is used the paving section shall consist of the following: a base course of Graded Aggregate Base Material four (4) inches thick after compaction and a surface course of Portland Cement Concrete eight (8) inches thick, including reinforcing steel. When using this type of material the widths shall be the same as that for asphaltic concrete paving. (See attached diagrams for the types of paving).

- 100.6 Industrial/Warehouse Roads:** Industrial/Warehouse roads are roads in areas that are zoned for industrial and/or warehouse use or an area shown as industrial or for warehouse use on the Future Land Use Plan of Dawson County.

Roadbeds shall have a minimum of twenty-six (26) feet of width of paved surface and 34 feet of width from shoulder point to shoulder point. The base course shall have a width of twenty-seven (27) feet and shall consist of Graded Aggregate Base Material eight (8) inches thick after compaction. There shall be an intermediate course of asphaltic concrete pavement type "B" modified mix, four (4) inches thick after compaction and a surface course of asphaltic concrete pavement type "E" mix, two (2) inches thick after compaction. If concrete paving is used the paving section shall consist of the following: a base course of Graded Aggregate Base Material six (6) inches thick after compaction and a surface course of Portland Cement Concrete eight (8) inches thick, including reinforcing steel. (See attached diagram).

- 100.7** If multiple layers of asphaltic concrete are being used, then a bonding agent of Bituminous Tack Coat shall be used between each succeeding layer of asphaltic concrete pavement.

- 100.8** Roads shall be crowned, properly drained and have ditches or curb & gutter (see Article II for culvert specifications). Shoulders and soil-disturbed rights-of-way shall be grassed and constructed in compliance with an approved soil erosion and sediment control plan and/or best management practices.
- 100.9** **Profile Grades:** Grades may not exceed 14% for local roads, 12% for collector roads, and 10% for commercial and other major thoroughfares. The grade at road intersections shall be level with the intersection for a distance of twenty (20) feet from the intersected road right-of-way.
- 100.10** **Dam Roads:** If a road crosses a Dam it shall meet the requirements of a commercial road for paving specifications and shall have guardrail installed on each side of the roadway in the shoulder area. The guardrail shall meet the requirements of the Georgia Department of Transportation standard specifications.
- 100.11** **Maintenance Statement:** It is anticipated that any deed tendered to Dawson County in this connection will contain a provision substantially as follows:
- 100.11.1** As a condition of acceptance of a road by Dawson County, Georgia, the Grantor shall maintain the road for a period of eighteen (18) months from the date of submittal to Dawson County, Georgia and continuing until release by the acceptance of the road by Dawson County; additionally, the Grantor shall post with the Board of Commissioners of Dawson County a Surety Bond in the amount of 10% of the total cost of the road for a period of eighteen (18) months from the date of submittal to Dawson County, which shall automatically renew until released by Dawson County; ten percent (10%) of the total cost of the road shall be as reasonably determined by the Public Works Director or the Dawson County Engineer.

Section 101. Acceptance

- 101.1** Upon construction the road will be inspected by the County Engineer and the Public Works Director. The road shall be re-inspected after eighteen (18) months to determine whether additional work is required. If additional work is required to make the road conform to the standards of Dawson County, then it shall be the responsibility of the Grantor(s). At

the end of eighteen (18) months and upon acceptance by the County of any additional work, if required, the Bond shall be released upon approval of the Board of Commissioners.

101.2 No road will be placed on the priority list for grading, drainage, base, or paving unless said road has a minimum right of way width of sixty (60) feet deeded to Dawson County.

101.3 The Grantor(s) must furnish the County with a proposed name of the road and if the name is approved by the 911 Coordinator, bear the cost to erect metal sign post(s) with approved metal sign(s) thereon giving the name of the road. He shall also erect or bear the cost of erecting approved traffic control signs at appropriate locations along the road as required by the Public Works Director or the County Engineer.

101.4 A standard utility location shall be maintained unless unusual topographic or construction conditions preclude the standard locations; then specific details shall be provided by the developer. (See attached diagram).

Article II. SPECIFICATIONS FOR GRAVEL ROADS

Section 200. Gravel Roads

A private gravel roadway or a gravel road presented for acceptance into the county's maintenance system as an existing or new gravel road pursuant to a variance granted by Dawson County Board of Commissioners shall meet the following minimum requirements:

200.1 The road must originate at a county maintained road or a state route.

200.2 The road must have a length of not less than 0.5 miles.

200.3 There are located on the road at least 5 dwellings.

200.4 All roads must have a 40-foot right of way deeded to Dawson County if accepted into the maintenance system. Rights-of-way must be cleared. Dead-end roads will have a cul-de-sac with a diameter of ninety-five (95) feet of travel lane.

200.5 Roadbeds shall have a minimum of twenty (20) feet of driving surface with a six (6) inch layer of compacted graded aggregate base or other

approved material. A coat of calcium chloride shall be applied at a rate of 0.03 gal/sq. yd. or greater as per accepted industry standards.

200.6 Roads shall be ditched, crowned, and properly drained. Shoulders and all disturbed rights-of-way shall be grassed and constructed in compliance with an approved soil erosion and sediment control plan or best management practices. All driveways shall have properly installed culverts in the roadway ditch which conform to the following specifications:

200.6.1 The culvert shall be a minimum of eighteen (18) inches in diameter and twenty-five (25) feet in length.

200.6.2 Culvert pipe size must be approved by the Public Works Director or the County Engineer, and must be made of concrete or galvanized steel.

200.6.3 Dawson County does not provide pipe or place pipe for driveways. This is the responsibility of the property owner and the county does not have pipe for sale.

200.6.4 A permit for each driveway must be obtained. A permit may be obtained by applying with the Public Works Department.

200.7 Grades may not exceed ten (10%). The grade at road intersections shall be level with the intersection for a distance of twenty (20) feet from the intersected road right of way. If the road crosses a Dam it shall be constructed to a width of twenty-four (24) feet of driving surface and twenty-eight (28) feet from shoulder point to shoulder point. The surface shall have a layer of graded aggregate base material six (6) inches compacted thickness and guardrail shall be installed as per the section above for Paved Roads or Dam Roads. The Dam under the roadway must meet the specifications of the Georgia Safe Dam Act.

200.8 The road will be inspected by the County Engineer or the Public Works Director and the road may be considered by the Board of Commissioners for acceptance.

200.9 The Grantor(s) must furnish the County with a proposed name of the road and if the name is approved by the 911 Coordinator, bear the cost to erect metal sign post(s) with approved metal sign(s) thereon giving the name of the road. He shall also bear the cost of erecting approved traffic control signs at appropriate locations along the road as required by the Public Works Director or the County Engineer.

ARTICLE III. SPECIFICATIONS FOR HISTORIC ROAD (GRAVEL)

Section 300. Historic Roads


- 300.1** These roads are generally of limited use and do not meet the County standards for gravel roads. These roads have historically become County roads by prior work done on the roads or agreements with previous Commissioners. The County will not routinely maintain these roads but will insure that they are maintained to allow for the safe flow of vehicle traffic.
- 300.2** Historic roads will be maintained on an as needed basis.

ARTICLE IV. OTHER SPECIFICATIONS


Section 400. Rights and Responsibilities

- 400.1** Any decision of the Public Works Director of Dawson County or the Dawson County Engineer or any other administrative personnel of Dawson County may be appealed to the Board of Commissioners of Dawson County by filing a written notice of appeal with the Clerk of Dawson County Commission within ten (10) days of the decision being appealed; otherwise, the decision of the Public Works Director of Dawson County, the Dawson County Engineer, or other administrative personnel in accord with the terms hereof shall be final.
- 400.2** **Severability** – If any paragraph, sub-paragraph, sentence, clause, phrase, or any portion of the resolution shall be declared invalid or unconstitutional by any court of competent jurisdiction, or if the provisions of any part of this resolution as applied to any particular situation or set of circumstances shall be declared invalid or unconstitutional, such invalidity shall not be construed to affect the portions of the resolution not so held to be invalid, or the application of the resolution to other circumstances not so held to be invalid. It is hereby declared to be the intent of the Board of Commissioners of Dawson County to provide for separable and divisible parts, and they do hereby adopt any and all parts as may be held invalid for any reason.
- 400.3** **Repealer** – All resolutions or parts of resolution in conflict with the terms of this resolution are hereby repealed but it is hereby provided that any resolution or law which may be applicable hereto and aid in carrying out or making effective the intent, purpose, and provisions hereof, which shall


TYPICAL ROAD
SECTION FOR
COLLECTOR ROADS

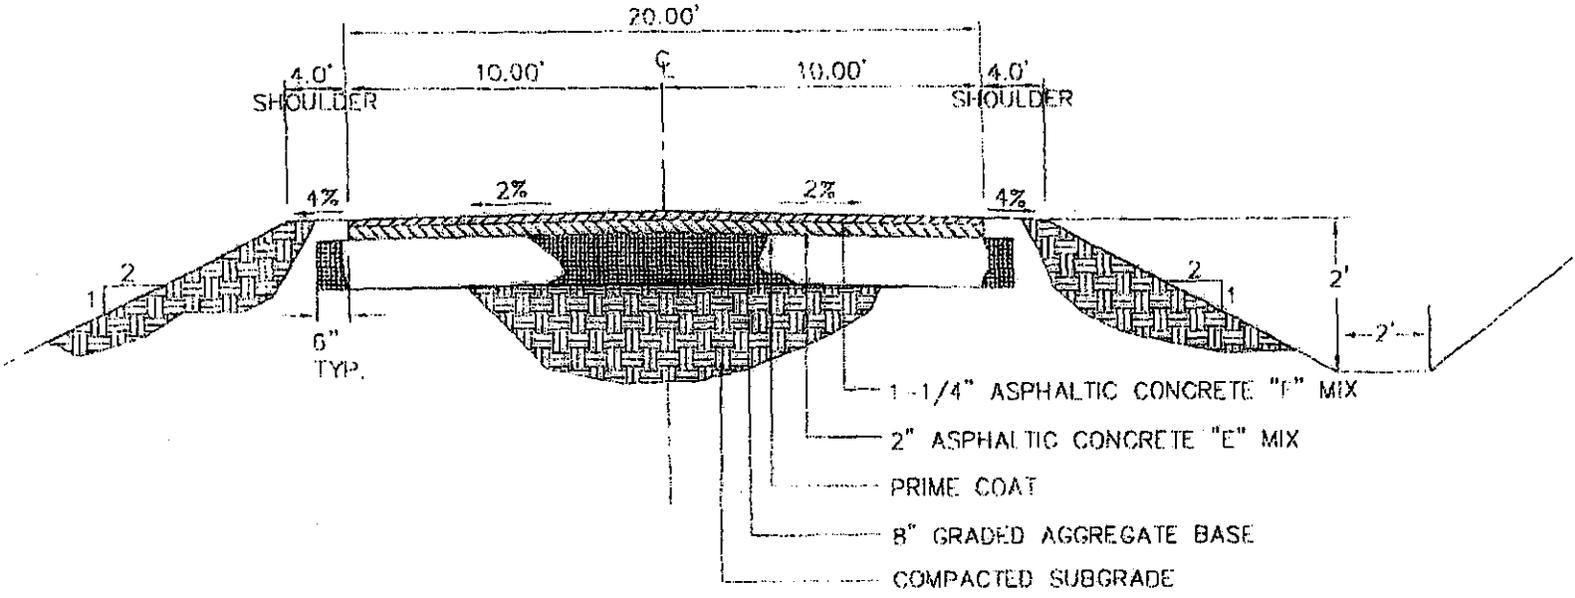


TYPICAL ROAD
SECTION FOR
LOCAL ROADS

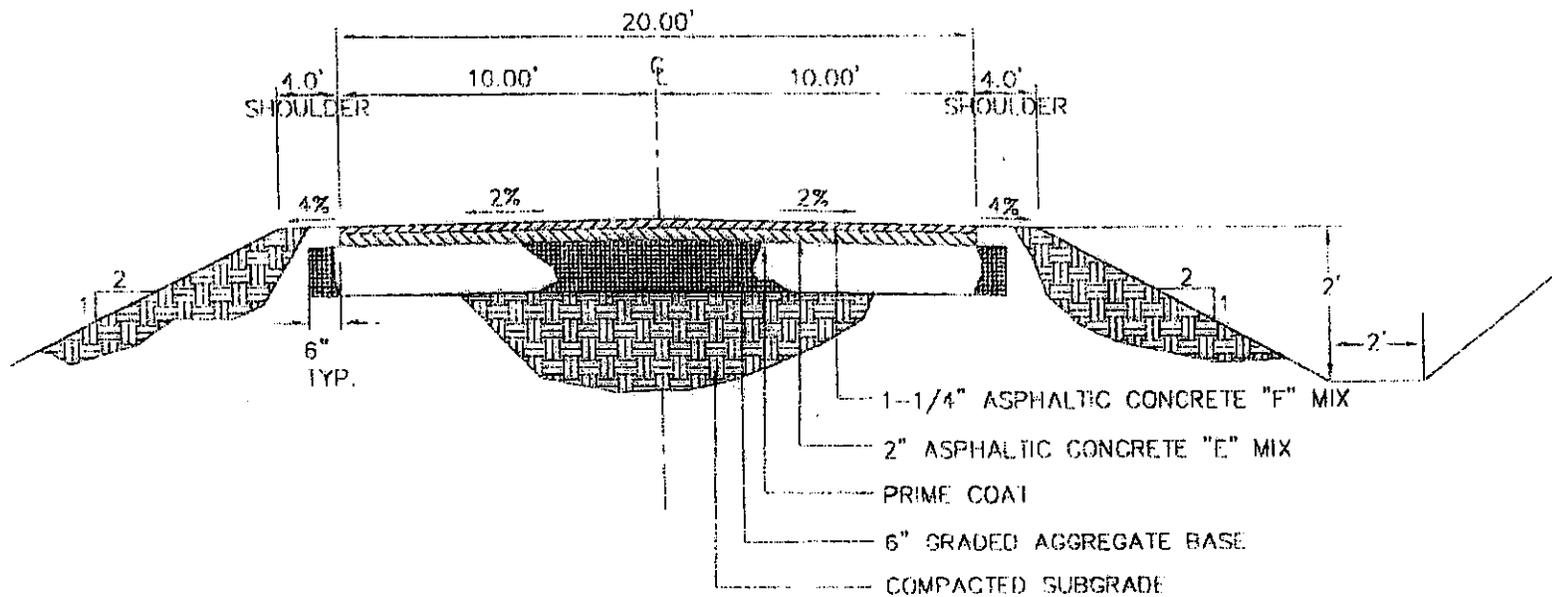


TYPICAL ROAD SECTION FOR COMMERCIAL CONCRETE ROADS

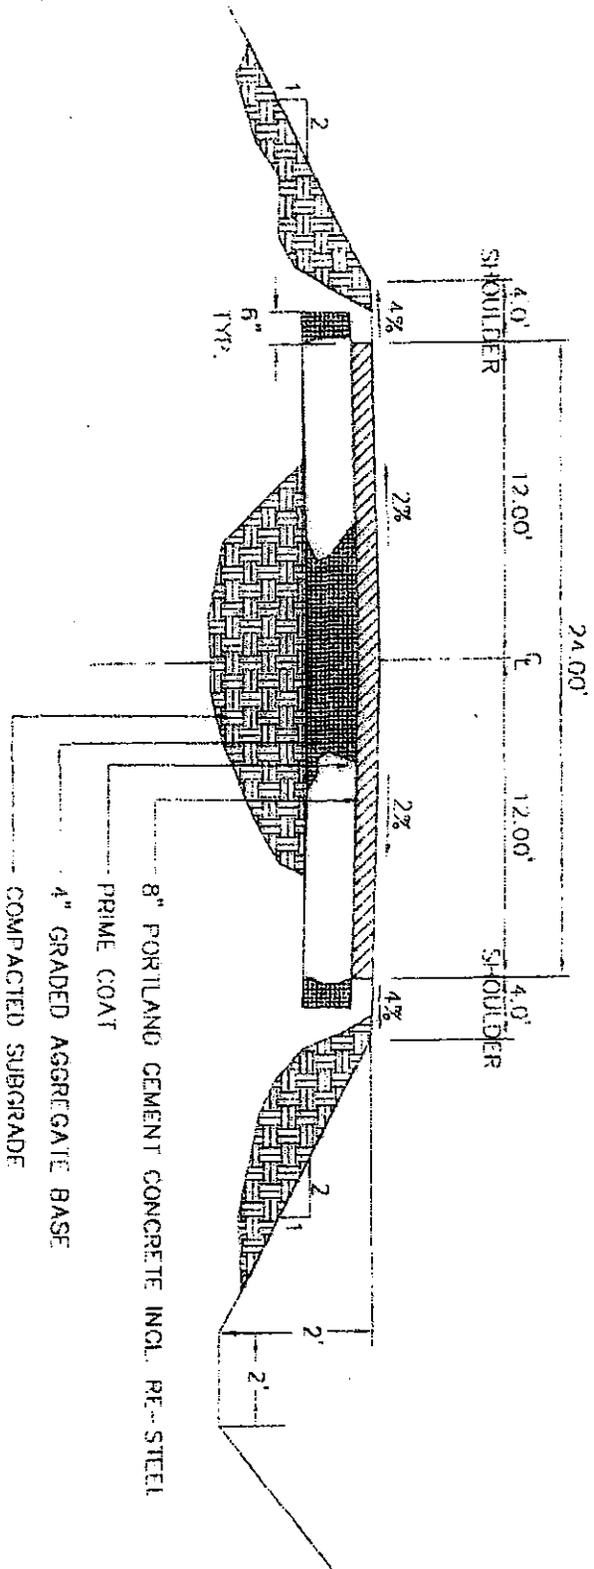

TYPICAL ROAD
SECTION FOR
COMMERCIAL ROADS

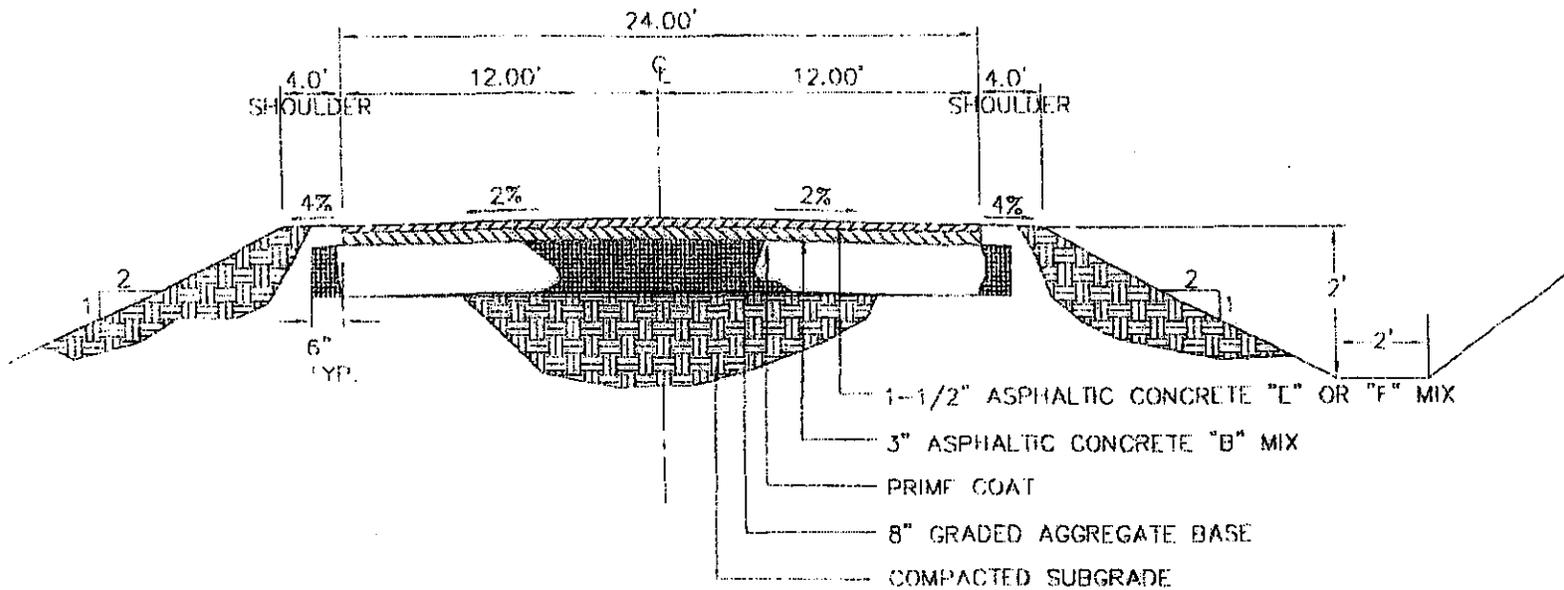

TYPICAL ROAD SECTION
FOR WAREHOUSE AND
INDUSTRIAL CONCRETE ROADS

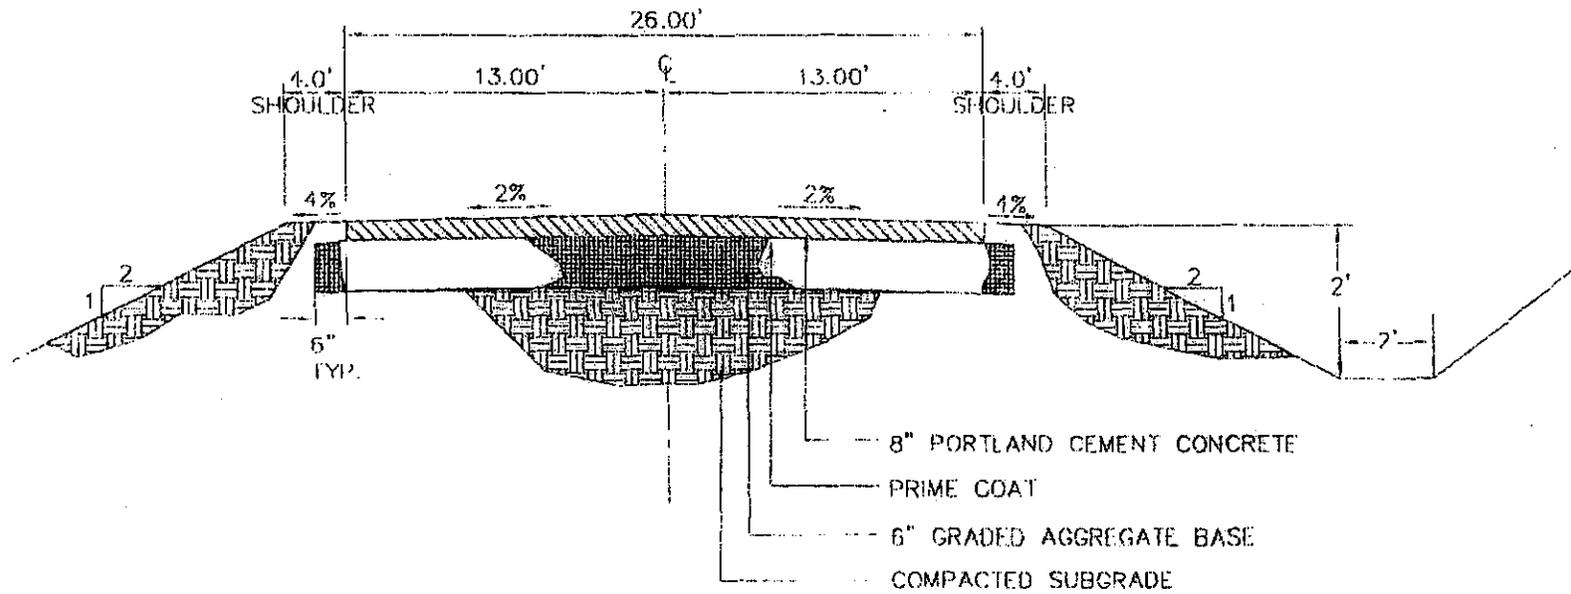


DAWSON COUNTY UTILITY PLACEMENT DETAIL RURAL STREET SECTION



CALL BEFORE YOU DIG
1-800-282-7411

NOTE:
NO UNDER-GROUND UTILITIES TO BE
INSTALLED PRIOR TO ROADWAY AND SLOPE GRADING

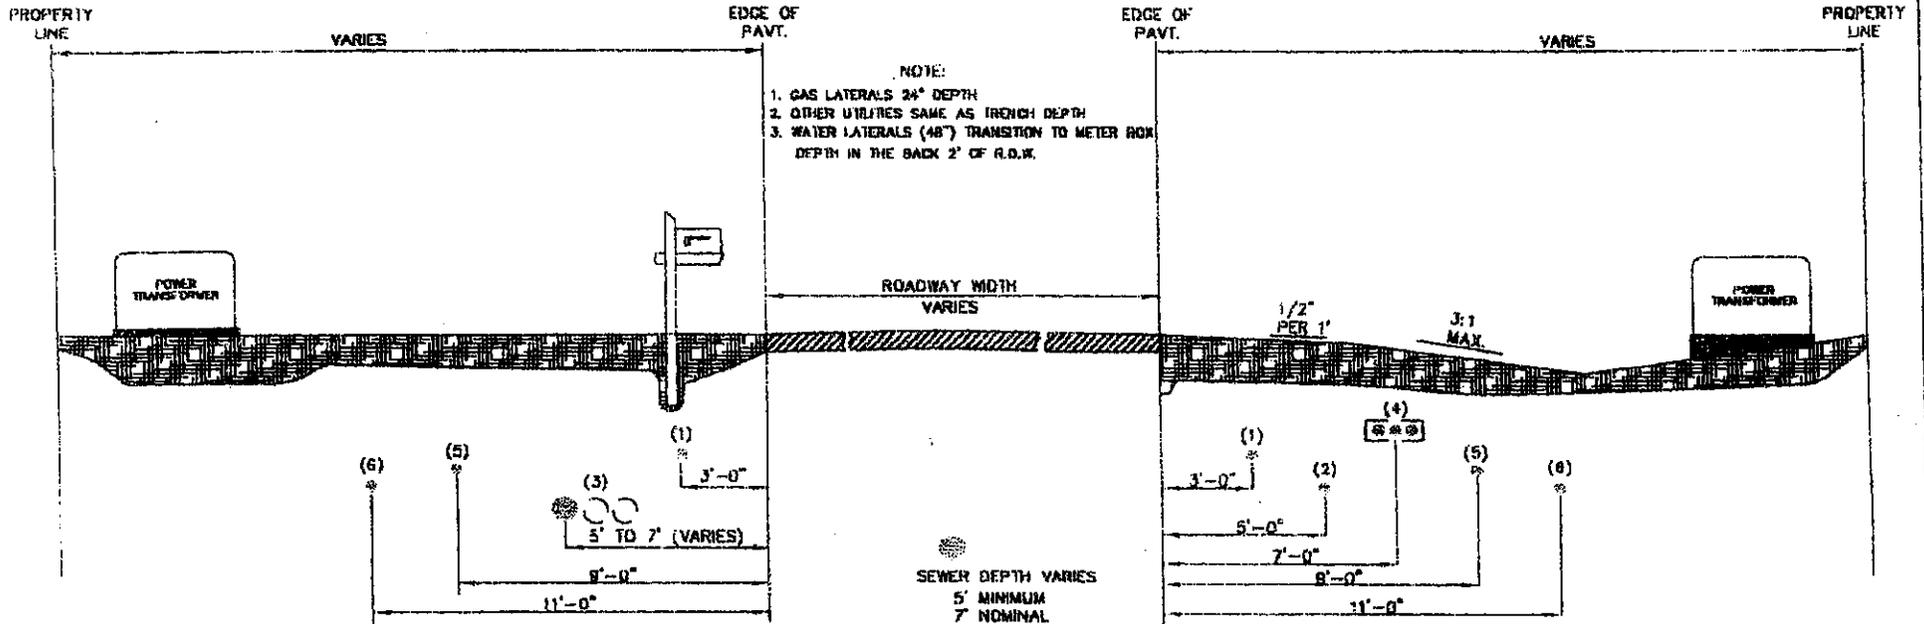

NOTE:
1. GAS LATERALS 24" DEPTH
2. OTHER UTILITIES SAME AS TRENCH DEPTH
3. WATER LATERALS (48") TRANSITION TO METER BOX
DEPTH IN THE BACK 2' OF R.O.W.

(1)
CATV
PAVT. DIST. - 3'
DEPTH - 24"
BOTH SIDES ROADWAY

(2)
GAS
PAVT. DIST. - 5'
DEPTH - 36"
EAST OR NORTH SIDE
OF STREET AS DETERMINED
AT SUBD. ENTRANCE

(3)
WATER
PAVT. DIST. - 5' TO 7'
DEPTH - 48"
WEST OR SOUTH SIDE
OF STREET AS DETERMINED
AT SUBD. ENTRANCE

(4)
MULTI-DUCT CONDUIT
PAVT. DIST. - 7'
DEPTH - 18"
REQUIRES SPECIAL PERMIT

UTILITIES PROTECTION CENTER
1-800-282-7411 METRO (770) 823-4344

(5)
TELEPHONE
PAVT. DIST. - 9'
DEPTH - 30"
BOTH SIDES OF ROAD
JOINT TRENCH
LOCATION FOR:
TELEPHONE, CATV

(6)
POWER
PAVT. DIST. - 11'
DEPTH - 36"
BOTH SIDES OF ROAD
JOINT TRENCH
LOCATION FOR:
PWR., TELE., CATV


NOTE:
THE BACK (4) FEET OF
THE R.O.W. IS RESERVED
FOR THE PLACEMENT OF
POLES, PEDESTALS, PULL
BOXES, METERS, AND
OTHER UTILITY DEVICES.

DAWSON COUNTY UTILITY PLACEMENT DETAIL CURB & GUTTER STREET SECTION



CALL BEFORE YOU DIG
1-800-282-7411

NOTE:
NO UNDER-GROUND UTILITIES TO BE
INSTALLED PRIOR TO ROADWAY AND SLOPE GRADING

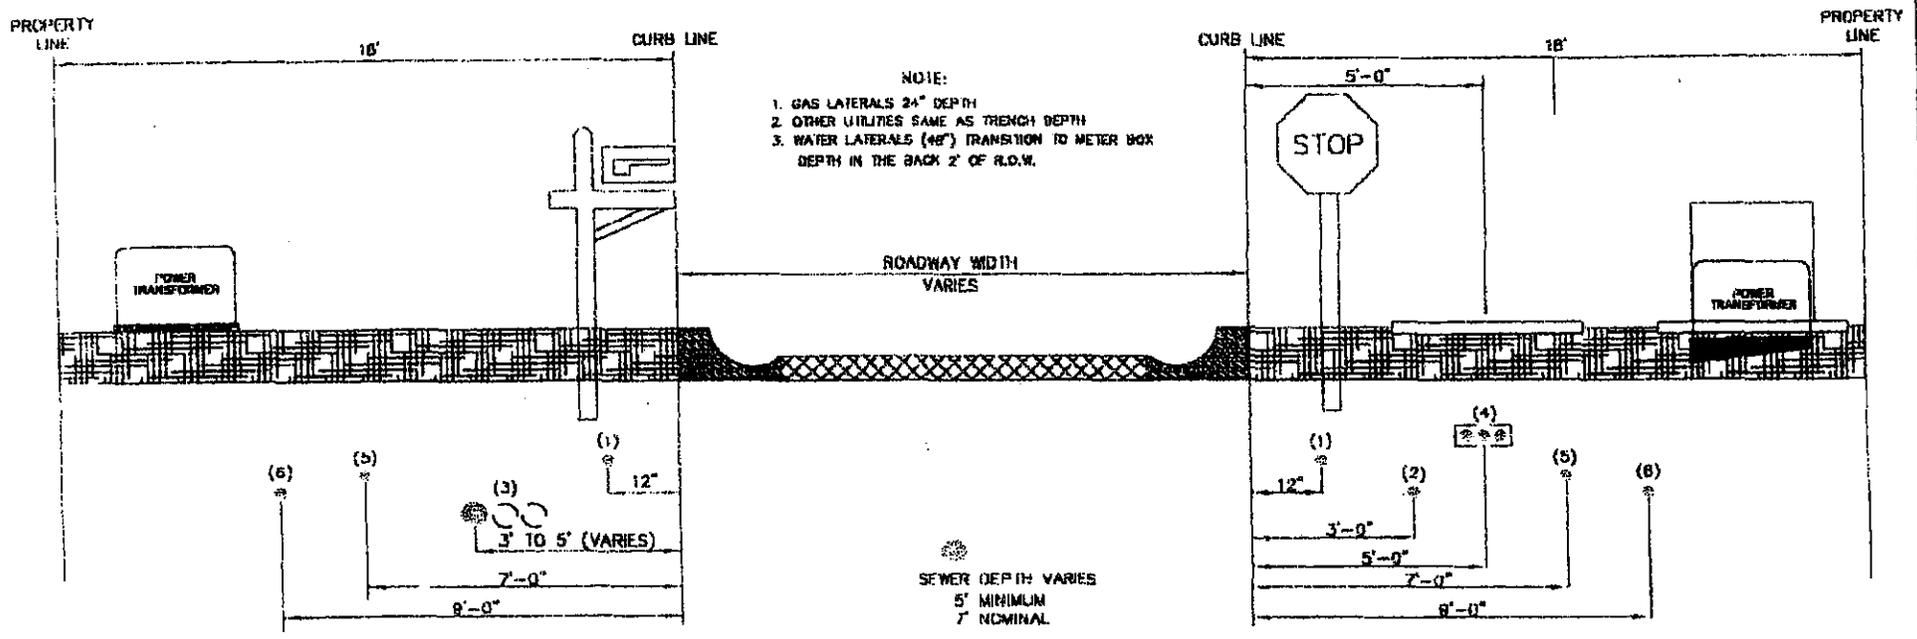

<p>(1) CATV CURB DIST. - 12" DEPTH - 24" BOTH SIDES ROADWAY</p>	<p>(2) GAS CURB DIST. - 3" DEPTH - 36" EAST OR NORTH SIDE OF STREET AS DETERMINED AT SUBD. ENTRANCE</p>	<p>(3) WATER CURB DIST. - 3" TO 5" DEPTH - 48" WEST OR SOUTH SIDE OF STREET AS DETERMINED AT SUBD. ENTRANCE</p>	<p>(4) MULTI-DUCT CONDUIT CURB DIST. - 5" DEPTH - 18" REQUIRES SPECIAL PERMIT</p>	<p>(5) TELEPHONE CURB DIST. - 7" DEPTH - 30" BOTH SIDES OF ROAD JOINT TRENCH LOCATION FOR: TELEPHONE, CATV</p>	<p>(6) POWER CURB DIST. - 8" DEPTH - 36" BOTH SIDES OF ROAD JOINT TRENCH LOCATION FOR: PWR., TELE, CATV</p>	<p>NOTE: THE BACK (4) FEET OF THE R.O.W. IS RESERVED FOR THE PLACEMENT OF POLES, PEDESTALS, PULL BOXES, METERS, AND OTHER UTILITY DEVICES.</p>
<p>UTILITIES PROTECTION CENTER 1-800-282-7411 METRO (770) 823-4344</p>						

be literally construed to be in favor of Dawson County is hereby adopted as a part hereof.


400.4 Effective Date – The effective date of the Resolution shall be the 15th day of December, 2005.

ADOPTED THIS 15th DAY OF December, 2005.



Mike Berg, Chairman
Dawson County Commissioners

Attest:



Clerk, Dawson County Commission